

HT-4

TECHNICAL FEATURES HT4

- 1 hydraulic cylinder per column
- automatic locking systems integrated in columns with pneumatic cylinders
- approach ramps which double as wheel stops during lifting operation


STANDARD EQUIPMENT:

- 2 runways made to specifications
- air supply incorporated inside runways
- synchronized system
- standard color blue
- low maintenance and trouble free service
- five year warranty (conditions apply)
- made in Canada



OPTIONS:

- front turn plates for alignment
- rear slip plates for alignment
- rolling jacks
- lighting
- opened front on certain models
- power supply 575/3/60
- custom made HT-4

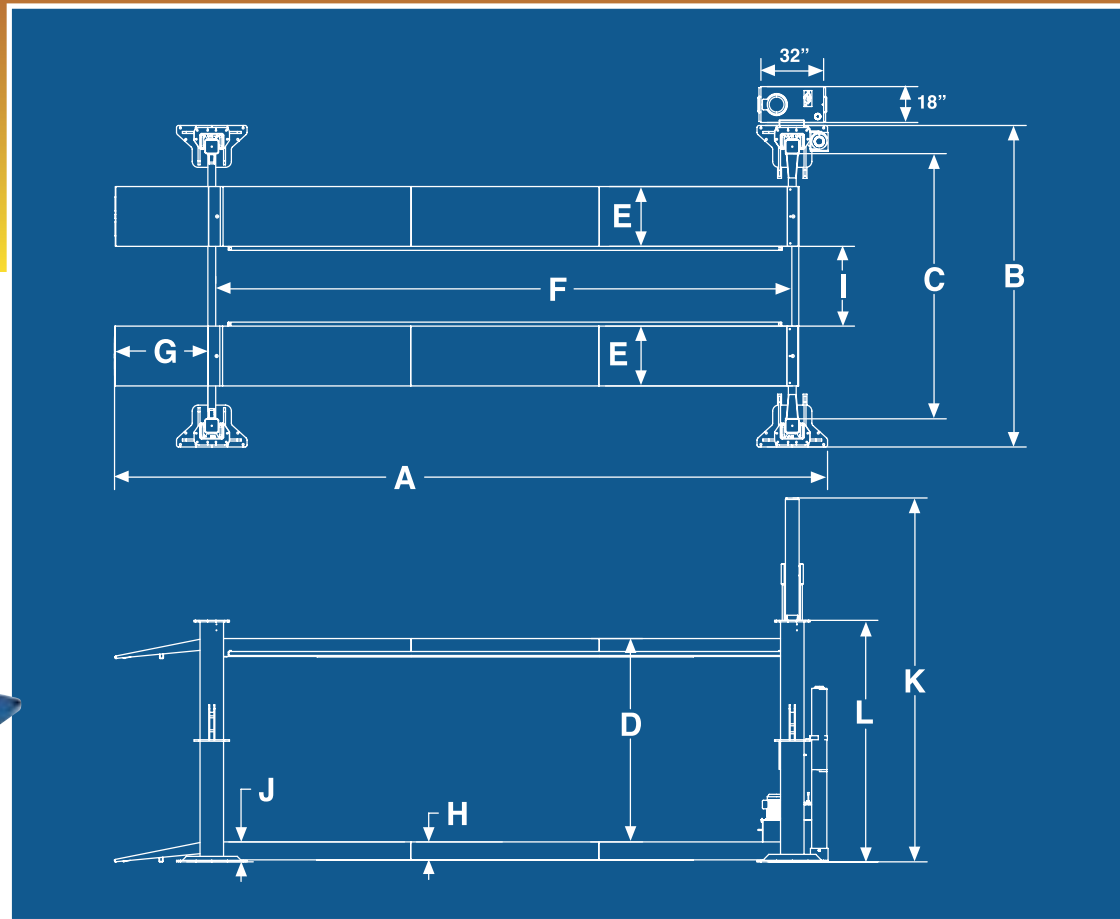

SPECIFICATIONS HT-4

HT-4 MODELS	15000	20000	25000	30000	40000	50000	60000
A- overall length	302"	302"	364"	364"	439"	439"	439"
B- overall width *	145"	145"	164"	164"	176"	176"	176"
C- width between posts	121"	121"	133"	133"	145"	145"	145"
D- travel	72"	72"	72"	72"	71"	71"	71"
E- width of runways	20"	20"	30"	30"	30"	30"	30"
F- length of runways	252"	252"	300"	300"	376"	376"	376"
G- length of approach ramps	48"	48"	48"	48"	48"	48"	48"
H- height of runways	6"	6"	9"	9"	9"	9"	9"
I- width between runways	40 to 48"	40 to 48"	45 to 51"	45 to 51"	45 to 55"	45 to 55"	45 to 55"
J- height of runways from floor	8"	8"	10"	10"	10"	10"	10"
K- clearance	153"	153"	153"	153"	153"	153"	153"
L- height of posts	121"	121"	121"	121"	121"	121"	121"
lift capacity	15 000 lbs	20 000 lbs	25 000 lbs	30 000 lbs	40 000 lbs	50 000 lbs	60 000lbs
drive motor	2 hp 230v	3 hp 230v	5 hp 575v	5 hp 575v	7.5 hp 575v	7.5 hp 575v	10 hp 575v
* add size of power unit	n.a.	B + 18"	B + 18"	B + 18"	B + 18"	B + 18"	B + 18"

OPTIONAL ACCESSORIES

rolling jacks	6 000 lbs	9 000 lbs	9 000 lbs	12 000 lbs	18 000 lbs	25 000 lbs	35 000 lbs
opened front or rear	yes	yes	yes	yes	yes	no	no
drive motor	3 hp 575v	3 hp 575v	n.a.	n.a.	n.a.	n.a.	n.a.